

STOCK # **22**
 GRADE II X-TRA
 TOUGH DUTY SUCTION


Price Rubber Corp.

S-110 WATER SUCTION COMPOUND / SBR - (STYRENE BUTADIENE RUBBER)

TENSILE (PSI)	ELONGATION (%)	MODULUS (300%)	TEMP. RATING	DURO (HARDNESS)	SPEC. GRAVITY
2400	640	1100	-40 / 220°	60 ± 5	1.14

**CARCASS / 100% POLYESTER – (PLAIN WEAVE, WARP & FILL)
 CONSTRUCTION: HAND BUILT, MANDREL WRAPPED.**

S-110

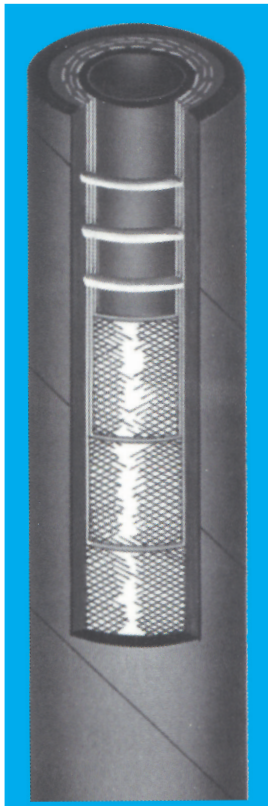

COLOR / SERVICE: Black - For Contractor and Agricultural Applications.

TUBE: SBR of 1/16", 1/8", 3/16" Thicknesses.

REINFORCEMENT: Multiple Plies of 110 lb. Polyester Fabric with a Medium Steel Spring Helical Wire.

COVER: SBR 1/16" Thick.

***BRANDING:** *Price* RUBBER CORP. S-110 WATER SUCTION 100 psi Made in USA

<i>PRC</i> ID	Ply	OD	WP	Bending Radius	Wt / Ft	Wire OAG
4"	3	5.1"	150	44"	3.5	.110
5"	3	6.1"	150	56"	4.3	.110
6"	3	7.2"	125	66"	5.6	.110
8"	4	9.4"	100	82"	8.8	.148
10"	5	11.7"	100	96"	13.1	.177
12"	6	13.9"	100	108"	17.7	.177

Price Rubber Corp.

FOR MORE INFORMATION, CONTACT YOUR LOCAL PRICE RUBBER CUSTOMER SERVICE:
 WATTS: (800) 633-1470 • FAX: (334) 271-3194
www.pricerubber.com